

Pro-Span™

Expansion Repair Coupling



Featuring patented
Grip-Lock™ that
locks spigot to body
for effective gluing

Redundant internal
dual-seal for safety

Easy-Grip bars for
improved handling
with wet hands

True-Cut feature
ensures perfect cut
to size every time



Control
Quality Products by NDS



Pro-Span™ Expansion Repair Coupling




Features & Benefits


Features

Grip-Lock (Patented)
Patented internal rotational lock of spigot to body


Dual-Seal
A redundant seal design for safety!




Glue-Well
Internal "trap" for excess glue on the socket end.



Easy-Grip
Eight "bars" with "easy to grip" edges and increased holding area



True-Cut
Cutting the damaged pipe section to the length of the compressed coupling positions the piston

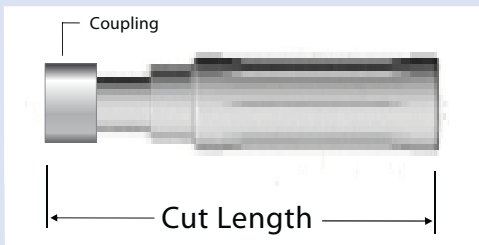

Benefits

Flo Control's patented "locking" feature allows the use of the body as a handle to glue both ends of the repair coupling onto the broken pipe. No other repair coupling allows the use of the body to glue both joints.

Stop the leak before it starts! Not all Repair Couplings include two seals!

Ensures glue stays where it should, so you don't get "stuck" with a glued-together repair coupling.

Positive grip for wet and muddy hands.
Easier to twist while pushing or pulling when gluing. This is now the best grip of any repair coupling available.

"True-Cut" automatically positions the piston seals in the body correctly. The correct position eliminates potential joint-separation stress caused by temperature swings, ground movement, or changes in line pressure. With True-Cut you get a perfect installation every time.

FLOF01 0801